

ONWA®


10.4 "

M

KF-1067

- : 50 , 200 50 & 200
- (),
- : 1 2
- 10.4 " TFT 8-

2 KW
High Power

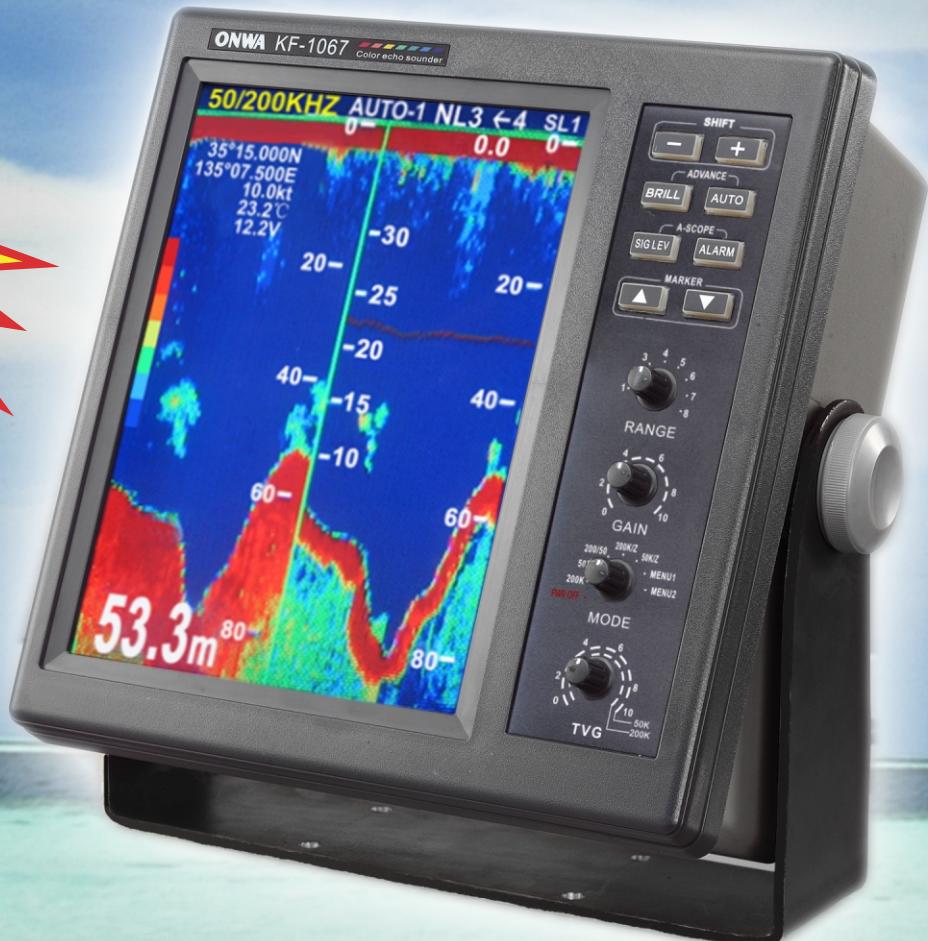

1.

- (1) 10.4 " TFT
 (2) 8 () , , ,
 (3) (: 5/10/20/40/80/150/300/600
 : 15/30/60/120/200/400/1000/2000
 : 3/5/10/20/40/80/150/300
 :
 (4) 300 (1000 ,150)
 (5) 2,3,4 5
 (6) 5/10 ,10/20 ,2/5
 (7) -
 (8) 50 200 : 1,
 50 (200 50) 1/2 (200),
 (200 50) .
 (9) , " "
 (10) ,1/8,1/4,1/2,1/1,2/1
 (11) TX 50 , 200 50 & 200KHz
 (12) 1 2
 (13) ()

| (| 5 | 10 | 20 | 40 | 80 | 150 | 300 | 600 |
|------|------|------|------|-------|-------|-------|------|------|
| (ms) | 0.1 | 0.1 | 0.1 | 0.2 | 0.4 | 0.7 | 1.5 | 2.5 |
| TX | 80ms | 80ms | 80ms | 160ms | 320ms | 560ms | 1.2s | 2.0s |

(14)

(15) , ()

(16) / NMEA 0183
 RMC, VTG
 SDDBT, SDDPT

(17) 1KW TGM60-50B-12L (50KHz, with 12 meters cable)
 TGM50-200B-12L(200KHz, with 12 meters cable)
 2KW TGM60-50A-15L (50KHz, with 15 meters cable)
 TGM50-200A-12L(200KHz, with 12 meters cable)

2.

(1) 12-24 VDC (10%,+30%) : 1.5 - 3.0 A

3.

- (1) 0°C +50°C
 (2) 85% 40°C
 (3) : IPX4
 (4) 1mm ±0%, 2(5) to 13.2Hz,
 (7 m/s², 13.2 to 100Hz

4.

- (1) : 2.5GY5/1.5
 : N3.0 Newtone No.5

